


PL-630: PHOTOINITIATOR BLEND

Description

PL-630 is a low viscosity liquid photoinitiator blend developed specifically for pigmented UV and LED curable coatings and gels. PL-630 is soluble in most monomers, oligomers and pre-polymers. It is insoluble in H₂O.

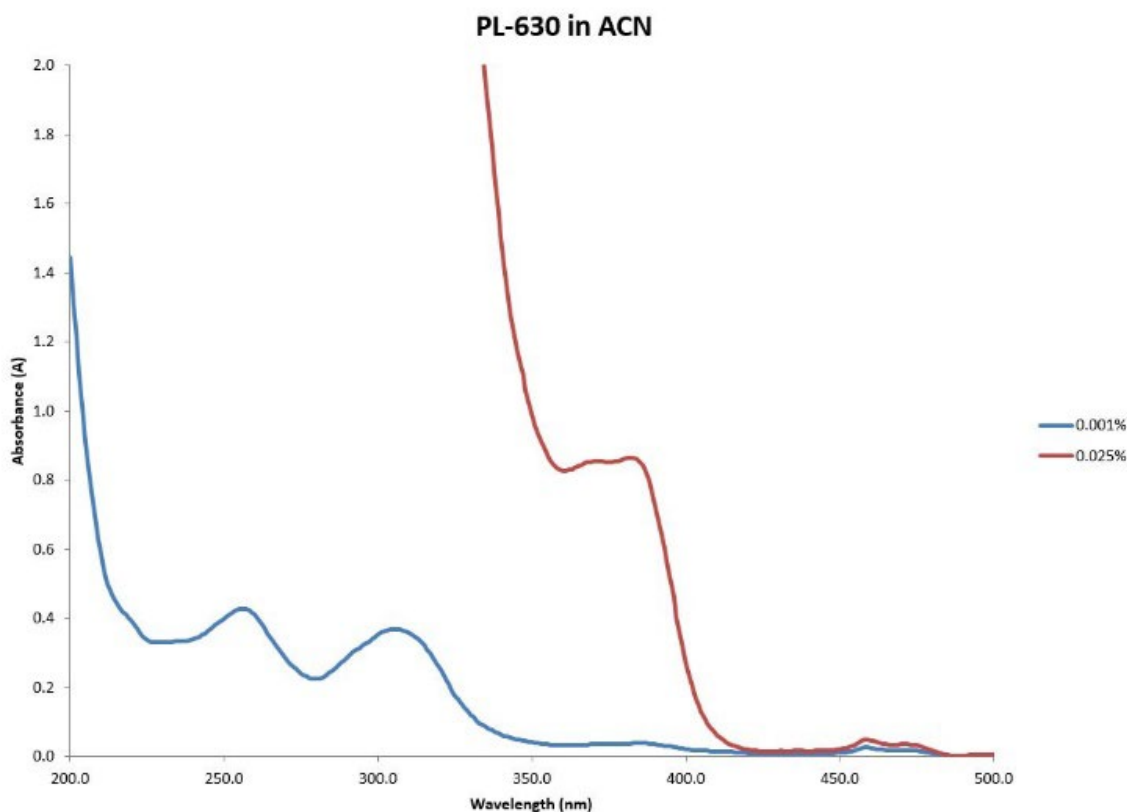

Performance Properties

- ✓ Very fast curing
- ✓ Excellent through and surface cure
- ✓ Easy to use liquid

Typical Applications

- ✓ Specifically designed for pigmented systems
- ✓ UV or LED systems

Typical Properties

Appearance	Amber Liquid
Viscosity @ 25C	100 cps
Specific Gravity	1.14 g/mL
Abs peaks	256, 304, 383 nm
Usage Levels	2 – 8 %

All information contained in this data sheet is given in good faith and without liability. It is intended to serve only as guidance. Users are advised to conduct their own evaluation of the product to determine its proficiency into products and processes. Users should ensure that the use of the product complies with all applicable current legislation.