


PL-655: PHOTOINITIATOR BLEND

Description

PL-655 is a liquid photoinitiator blend developed specifically for pigmented UV and LED curable coatings and gels. PL-655 is soluble in most monomers, oligomers, and pre-polymers. It is insoluble in H₂O.

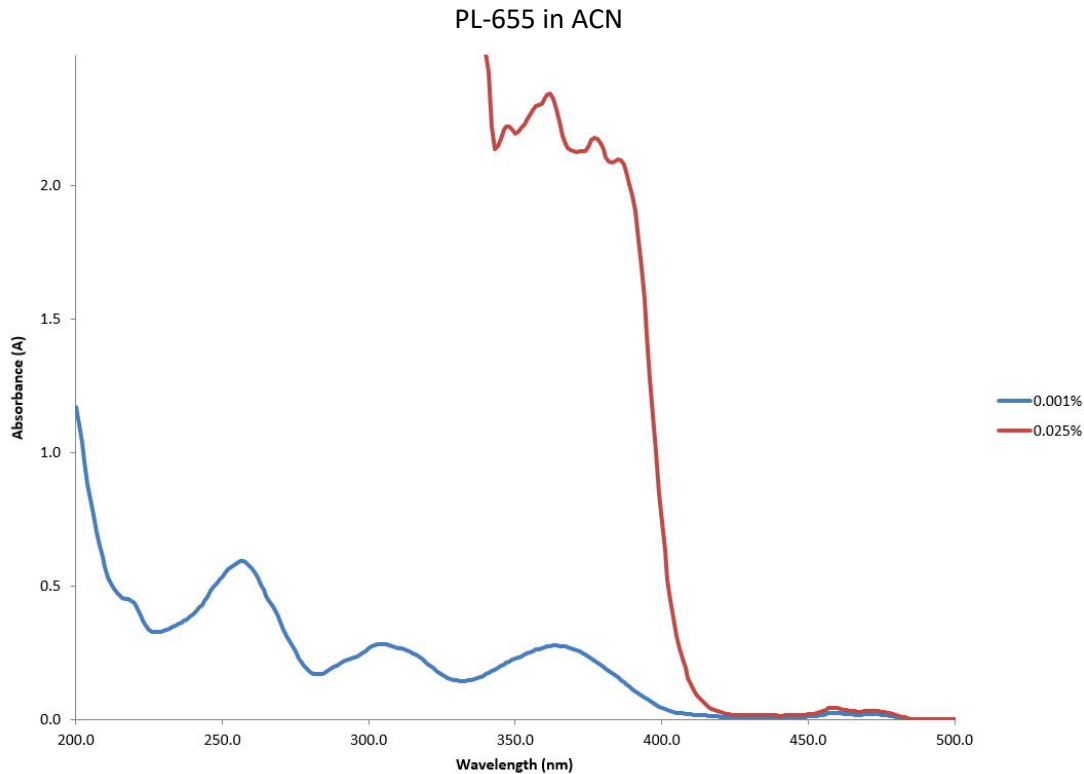

Performance Properties

- ✓ Very fast curing
- ✓ Excellent through and surface cure
- ✓ Easy to use liquid

Typical Applications

- ✓ Specifically designed for pigmented systems
- ✓ UV or LED systems

Typical Properties

Appearance	Clear yellow liquid
Viscosity @ 25C	600 – 1000 cps
Abs peaks	254, 305, 380 nm
Odor	Faint, characteristic
Usage Levels	7.5 – 12.5 %

All information contained in this data sheet is given in good faith and without liability. It is intended to serve only as guidance. Users are advised to conduct their own evaluation of the product to determine its proficiency into products and processes. Users should ensure that the use of the product complies with all applicable current legislation.



ESSTECH, Inc.

48 W Powhattan Avenue, Essington, PA 19029
610-521-3800

www.esstechinc.com
sales@esstechinc.com