


PL-6976: Triarylsulfonium Hexafluoroantimonate Salts in Propylene Carbonate

Description

PL-6976 is a mixed aryl sulfonium salt cationic photoinitiator. It is very fast curing and provides lower yellowing than PL-6992. It is soluble in most cycloaliphatic epoxies as well as vinyl ethers and other vinyl terminated monomers but insoluble in H₂O.

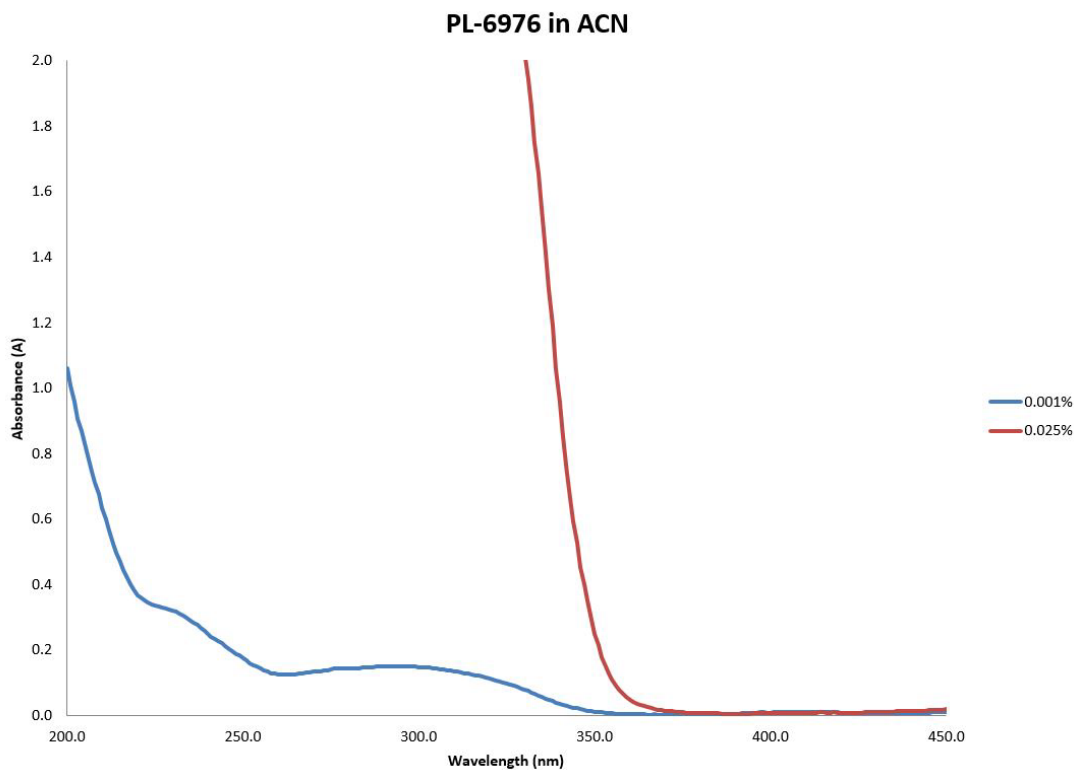

Performance Properties

- ✓ Very fast curing
- ✓ Good in thick or pigmented films

Typical Applications

- ✓ Coatings for graphic arts, wood, plastics, metals

Typical Properties

Appearance	Pale yellow liquid
Viscosity @ 25C	75 cps
Specific Gravity	1.39 g/mL
Odor	Faint, characteristic
Usage Levels	0.3 – 10 %

All information contained in this data sheet is given in good faith and without liability. It is intended to serve only as guidance. Users are advised to conduct their own evaluation of the product to determine its proficiency into products and processes. Users should ensure that the use of the product complies with all applicable current legislation.